



ALVI Officine Meccaniche E. Viazzo & C. s.r.l.

S.S. 230 n. 49 - 13030 CARESANABLOT (VC) - ITALIA

Tel. +39 0161 234600 - Fax +39 0161 234633


E-mail: info@alvi-italia.com - www.alvi-italia.com

SY 5000 2B

SY5000ON050

Cupboard trolley for 2-3 sections shuttle

Body in AlMg3 light alloy sheet, anodized (10 micron). Equipped with 2 stainless steel rails on bottom, suitable for 2 or 3 sections shuttle (5020 and 5025). Double wing door built with 2,5 mm bent sheet and welded reinforcements on top and bottom, with continuous hinges, opening at 270° with additional stopping position at 260° for disinfection inside tunnels. Door fastening by one vertical thumb-latch hooking on top and bottom. The truck is equipped with an EPDM gasket all around the opening: door, bottom and cover. The gasket, the central junction and the four corners of the opening grant airtight protection during the transport outside sterile areas. One push-handle on each short side. Stainless steel strong non-twisting bottom frame. Non-marking grey rubber buffer on bottom and on top. 2 fixed and 2 swivelling wheels dia. 160 mm with super elastic grey rubber ring, balls-bearings with waterproof plastic protection and stainless steel housings. Central brake.

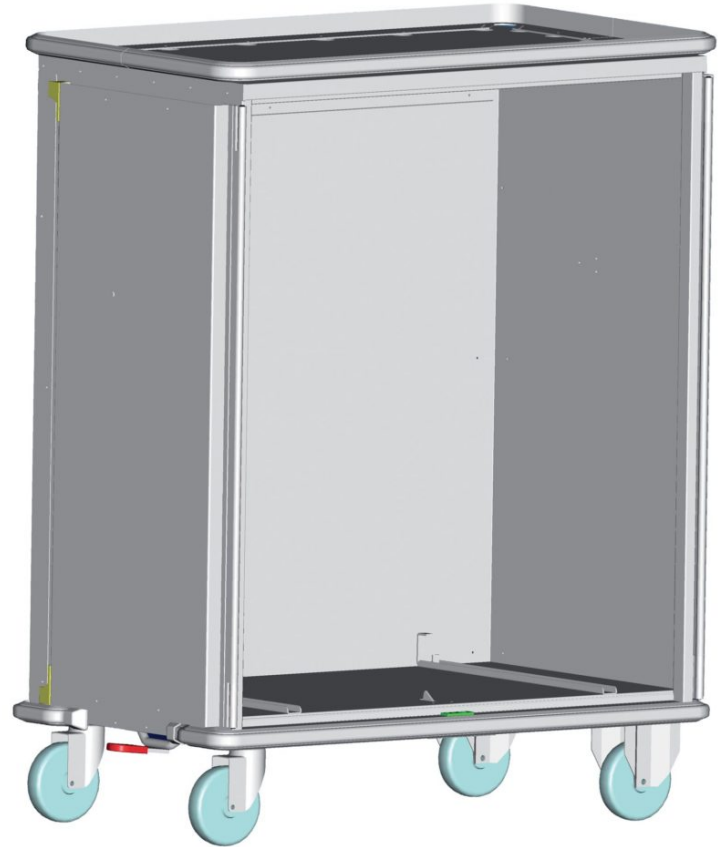

External dimensions 1230 x 710 x 1555 mm h

Capacity 1 ISO-NORM 2-section shuttle or 1 DIN-NORM 3-section shuttle

Weight 70 kg